


ANTICOR Plast 701-40

CORROSION PROTECTION

TAPE STRUCTURE



PRODUCT DESCRIPTION

Backing:

- Synthetic non-woven fabric.

Adhesive:

- Petrolatum plastic mass with corrosion inhibitors.

Colour:

- Sahara.

TECHNICAL DATA

Parameters	Unit	Value
Total thickness	mm	≥ 1.2
Dielectric strength	kV/mm	> 9.81
Operating temperature	°C	≤ 30
Adhesion to protected surface	-	cohesive

Product holds the certificate of the DVGW Institute, the attestation of the National Institute of Hygiene and building mark „B”.

Product is the element of corrosion protection system in A30 class (according to EN 12068). ANTICOR Plast system contains the following components:

- ANTICOR Plast 745 mastic
- ANTICOR Plast 701-40 tape, 2x50% overlap
- ANTICOR Plast 732-08 protection tape, 1x50% overlap



ANTICOR Sp. z o.o. holds the ISO 9001:2015 certificate.

ANTICOR Plast 701-40

Corrosion protection petrolatum tape for A30 class according to EN 12068.

APPLICATION

- As corrosion protection of T-joints, flanges and muff joints, pipe fittings, joints, and valves.
- As an insulation of underground lightning connections.


FEATURES & ADVANTAGES

- The unique anticorrosion mass containing corrosion inhibitors based on mineral oil.
- The base oil with corrosion inhibitors constantly affects protected surface penetrating its structure.
- Do not change its properties throughout the period of use (does not harden).
- Compatible with all types of insulation coatings.
- Easy and fast to apply.
- High electric strength.
- Does not contain ingredients harmful to health and the environment (Certified by the National Institute of Hygiene).

USAGE

- Materials for insulating coatings should be conditioned immediately before use at the temperature of 10÷25°C.
- Apply to the dry, clean, and degreased surface.
- Wrap the tape around the surface spirally stretching a bit, with 50% overlap. If combining with the existing insulation it is necessary to make 10 cm overlap of the existing coating.

NOTE:
the tape must be applied with the thick layer to the surface.

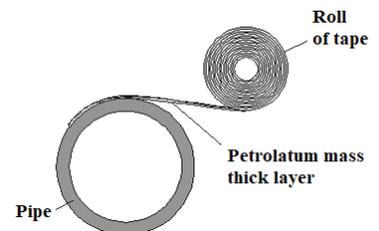

- After application smooth the tape surface by hand.
- Optimal application temperature: 10 ÷ 30°C.

STORAGE

- Store the product in dry area in original packaging.
- Protect the cartons against mechanical damage.
- The recommended storage temperature: up to 25°C.

PRODUCT FORM & SIZE AVAILABLE

Cut rolls: 30, 50, 100 mm x 10 m, other sizes available on individual request.

