


# Polytex 118

## INDUSTRIAL TAPES

### TAPE STRUCTURE



### PRODUCT DESCRIPTION

**Backing:**

- Foil PE laminated cotton cloth.

**Adhesive:**

- Natural rubber.


**Colour:**

- White, black, blue, green, red, yellow.

### TECHNICAL DATA

Physical Properties	Unit	Value
Total thickness	mm	0.25
Temperature range	°C	4 ÷ 93
Tensile strength	N/cm	min. 45.5
Adhesion to steel	N/cm	min. 6.02
Elongation	%	max 17

Product meets the applicable restrictions of RoHS Directive and Reach regulations.

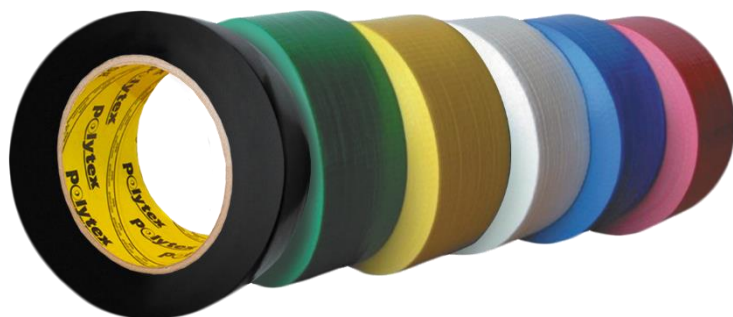

ANTICOR Sp. z o.o. holds ISO 9001:2015 certificate.

### Polytex 118

Professional duct tape for different applications.

### APPLICATION

- Holding, securing, seaming, repairing, bundling, splicing, packaging, masking and as moisture barrier.
- Marking on the floor in industrial hall communication lines, safety zone etc.
- Joining and tightening thermal insulation.
- Tightening air-conditioning and ventilating ducts.

### FEATURES AND ADVANTAGES

- High tensile strength.
- Very good adhesion.
- Aggressive tack.
- Waterproof backing.
- Good handling characteristics.
- Resists twisting or curling.
- Well fits into irregular profiles and surfaces.
- No cutting tools necessary.
- Non-staining

### USAGE

- Apply to the dry, clean, and degreased surface, free from other contaminants.
- Optimal application temperature: 10 ÷ 40°C.
- During application use tension and pressure to smooth the tape by hand.

### STORAGE

- Store the product in dry area in original packaging.
- Protect the cartons against mechanical damage.
- The recommended storage temperature: up to 25°C.

### PRODUCT FORM & SIZE AVAILABLE

48 mm x 50 m, other sizes available on individual request.